

Adjustable, Without Free Travel


HBD-50 to HBD-85 Hydraulic Dampers

Regulation at the highest level

Motion control in both directions: The HBD model of hydraulic dampers can be adjusted independently in both the push and pull direction. These maintenance-free, ready-to-install and closed systems leave no prayers unanswered as far as the setting of retraction and extension speeds are concerned. In addition each damper works without any free travel therefore the flow of oil can be regulated exactly via the two precision metering orifices.

Adjustment can be made once installed and even when moving through stroke. The coated body and hard-chromed piston rods stand for quality and long service life. The variety of mounting accessories makes assembly easy and the high-end hydraulic dampers universally usable.

HBD hydraulic dampers are used in the automotive, in industry, mechanical engineering and medical technology.

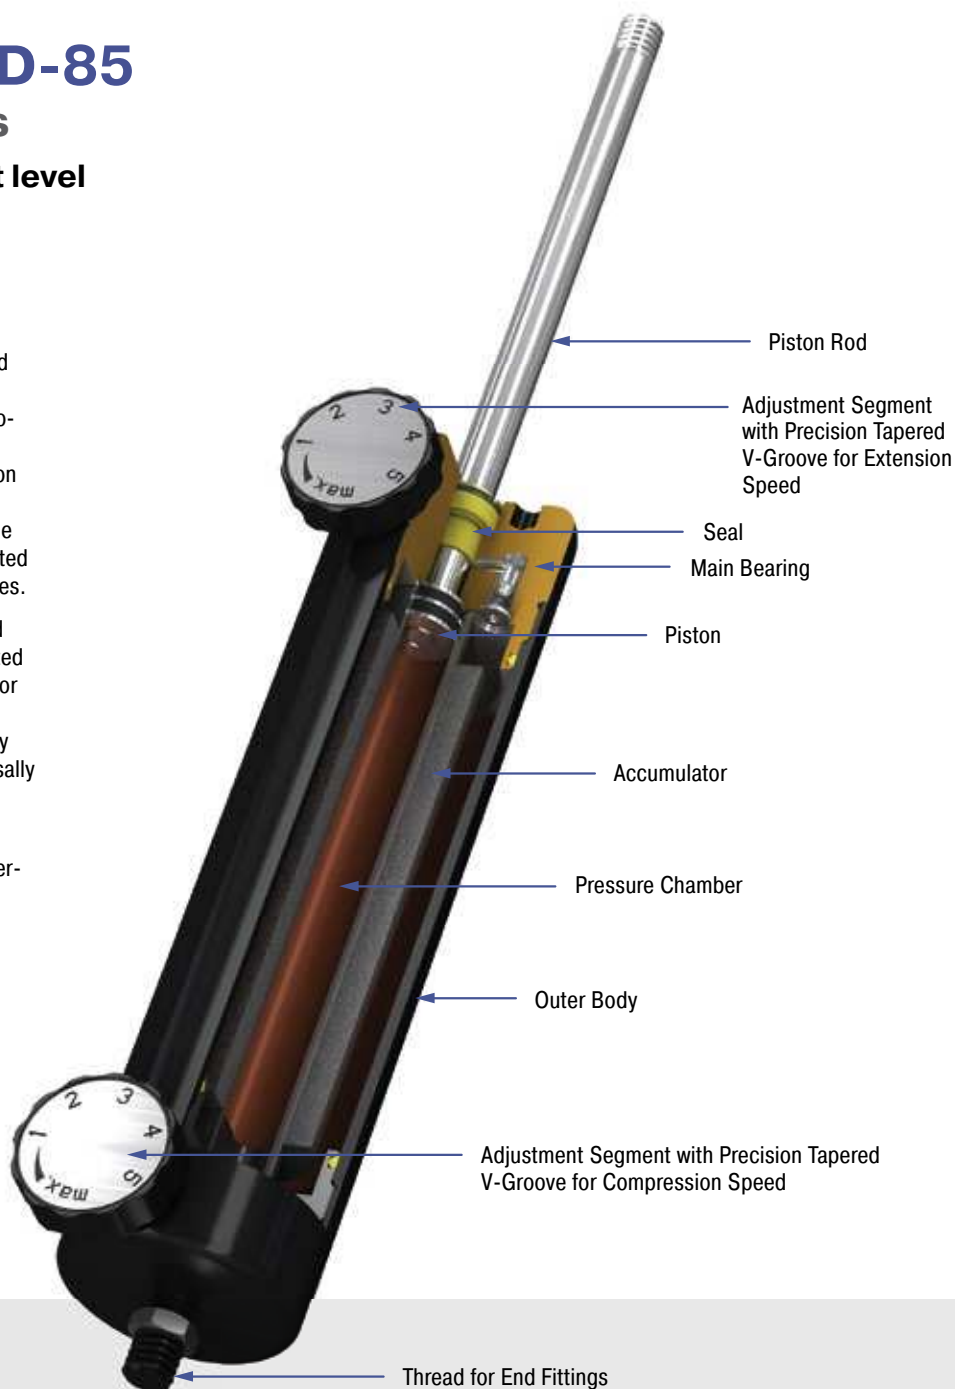

Technical Data

Compression and extension force:

150 N to 50,000 N

Outer body diameter: Ø 50 mm to Ø 85 mm

Piston rod diameter: Ø 10 mm to Ø 20 mm

Lifetime: Approx. 10,000 m

Operating temperature range: 0 °C to 65 °C

Adjustment: Steplessly adjustable

Positive stop: External positive stops 1 mm to 3 mm before the end of stroke provided by the customer.

Damping medium: Hydraulic oil

Material: Outer body: Coated steel; Piston rod: Hard chrome plated steel; End fittings: Zinc plated steel

Mounting: In any position

Application field: Sports equipment, Rehabilitation technology, Conveyor technology

Note: Increased break-away force if unit has not moved for some time. One locknut included.

End fittings: They are interchangeable and must be positively secured by the customer to prevent unscrewing.

On request: Special oils and other special options. Alternative accessories available on request.

Adjustable, Without Free Travel, Compression and extension force 150 N to 50,000 N

End Fitting

Standard Dimensions

End Fitting

B24 M24x2 Thread Adaptor

D24 Clevis Fork D24 max. force 50,000 N

E24 Swivel Eye E24 max. force 50,000 N

Stroke: $\varnothing 20$

L +/- 2 mm extended

$\varnothing 85$

$\varnothing 46$

28, 14, 17, 35, 35

Performance and Dimensions			
TYPES	Stroke mm	L extended mm	¹ Compression Force max. N
HBD-85-100	100	313	50,000
HBD-85-150	150	413	30,000
HBD-85-200	200	513	20,000
HBD-85-300	300	713	10,000
HBD-85-400	400	913	6,500
HBD-85-500	500	1,113	4,000
HBD-85-600	600	1,313	3,000
HBD-85-700	700	1,513	2,000

¹ Max. extension force for all stroke lengths 50,000 N.

Ordering Example **HBD-85-300-EE**

Type (Hydraulic Damper) _____

Body \varnothing (85 mm) _____

Stroke (300 mm) _____

Piston Rod End Fitting E24 _____

Body End Fitting E24 _____


Model Type Prefix

P: Damping in both directions (standard model)

M: Damping on out stroke only (adjustment knob at "rear end" free flow)

N: Damping on in stroke only (adjustment knob at "piston rod end" free flow)

Mounting accessories see from page 194.

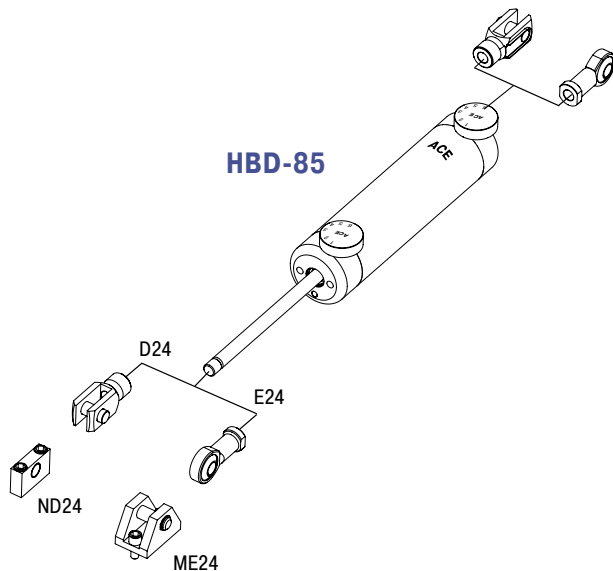

Technical Data

Compression and extension force: 150 N to 50,000 N

Operating temperature range: 0 °C to 65 °C

Adjustment: Steplessly adjustable

Positive stop: External positive stops 2 mm to 3 mm before the end of stroke provided by the customer.

Material: Outer body: Coated steel; Piston rod: Hard chrome plated steel; End fittings: Zinc plated steel

Mounting: In any position

Note: Increased break-away force if unit has not moved for some time. Thread adaptor for piston rod from M16 to M24 included.

End fittings: They are interchangeable and must be positively secured by the customer to prevent unscrewing.