



# 带壳磁铁




①代号	类型	①		②		最高工作温度
		M材质	S表面处理	M材质	S表面处理	
MTBULY	切槽型	45#	无电解镀锌	钕磁铁	镀锌	80° C
MTBULL	内六角孔型					

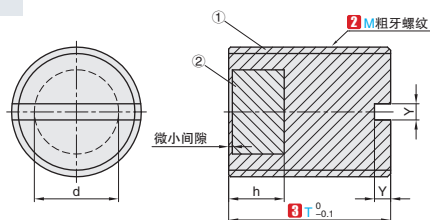

MTBULY  
切槽型

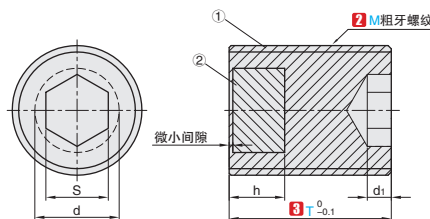

MTBULL  
内六角孔型



▲ 吸附力、表面磁通密度为参考值。

K2  
磁铁



①代号 - ②M - ③T  
MTBULY - M6 - T8

①代号	②M	③T	d	h	M (粗牙螺纹)	切槽型		内六角孔型		吸附力 (kgf)	表面磁通密度 高斯(G)
						Y	S	d <sub>1</sub>			
(切槽型) MTBULY (内六角孔型) MTBULL	6	8	4	5	M6X1.0	1.5	-	-	-	0.4	4000~4400
		15					3	3			
	8	8	5	M8X1.25	1.5	-	-	-	0.8	4100~4600	
		15				4	3				
	10	8	6	M10X1.5	2	-	-	-	1.7	4100~4600	
		15				5	3				
	12	12	7	M12X1.75	2.5	-	-	-	3.3	2300~3000	
		20				6	3				
16	14	10	M16X2	2.5	-	-	-	6.2	4600~4900		
	20				8	3					
20	16	13	M20X2.5	2.5	-	-	-	12.6	2700~3400		
25	10				4						