
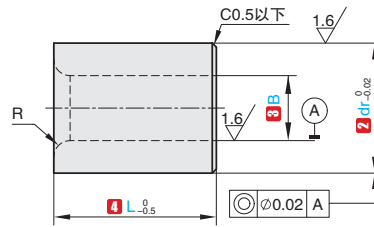


直柱型 · 选择型 / 指定型

产品特点：外径为负公差，不受压入影响。



▲ 壁厚为 2mm 以下时, R 为 0.5。



订购编号示例

1 代号 - 2 dr - 3 B - 4 L - 5 材料代码
 CEDB - 10 - B3 - L10 - A

1 代号	2 dr	3 B	B 公差		4 L	R	B	H7	
普通型 CEDB	10	3	+0.03 +0.01		10	1	2.00~3.00	+0.001 0	
		4			10 15				
		5			10 15				
		6			10 15				
		8			15				
		6			15		0.5	6.01~10.00	+0.015 0
	8	15 20							
	10	15							
	10	15 20							
	12	15 20							
	12	15 20	0.5	18.01~30.00	+0.021 0				
	16	15 20							
16	15 20								
16	20 25	0.5		30.01~32.00	+0.025 0				
16	20 25								
16	25								
精密型 CEEB	10		4	H7		10 15	1	2.00~3.00	+0.001 0
			5			15			
			6			15			
		6	15			0.5		6.01~10.00	+0.015 0
		8	15 20						
		8	20						
	10	15 20							
	10	20	2	18.01~30.00	+0.021 0				
	13	20 25							
	13	25							

代号	5 材料代码	材质	表面处理	硬度
CEDB CEEB	A	SKS93	-	50~60HRC

产品特点：外径为负公差，不受压入影响。

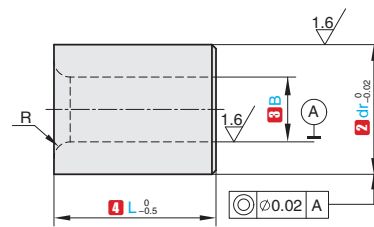

▲ 壁厚为 2mm 以下时, R 为 0.5。

订购编号示例

1 代号 - 2 dr - 3 B - 4 L - 5 材料代码
 CEFB - 10 - B3 - L10 - A

1 代号	2 dr	3 B 指定单位 0.01mm	B 公差		4 L 指定单位 1mm	R	B	H7
			CEFB	CEGB				
普通型 CEFB	8	2.00~6.00	+0.03 +0.01	H7	5~40 B < 5 时 L ≤ B×4 B ≥ 5 时 L ≤ B×3	1	2.00~3.00	+0.001 0
	10	2.00~8.00						
	12	4.00~10.00						
	16	8.00~14.00						
	20	10.00~18.00						
	25	15.00~23.00					2	6.01~10.00
30	20.00~27.00							
35	25.00~32.00							
精密型 CEGB	8	2.00~6.00	H7	5~40 B < 5 时 L ≤ B×4 B ≥ 5 时 L ≤ B×3	2	6.01~10.00		+0.015 0
	10	2.00~8.00						
	12	4.00~10.00						
	16	8.00~14.00						
	20	10.00~18.00						
	25	15.00~23.00				0.5	18.01~30.00	+0.021 0
30	20.00~27.00							
35	25.00~32.00							

代号	5 材料代码	材质	表面处理	硬度
CEFB CEGB	A	SKS93	-	50~60HRC