





①代号	M材质	S表面处理	轴承M材质	组件
WDAY	A6061	本色阳极氧化	钢	孔用C型挡圈(SS304)

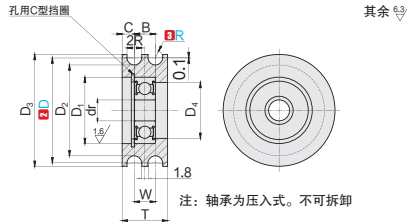

双槽型
WDAY



①代号 - ②D - ③R - ④追加加工代码
 WDAY - D30 - R1.1
 WDAY - D45 - R2.1 - DS

①代号	主要尺寸												
	②D	③R	dr	D ₁	D ₂	D ₃	D ₄	T	W	轴承公称型号	B	C	适用圆皮带直径
WDAY	15		3	10	13	17	8	9	4	RM623-2Z	4		2
	20	1.1	4	13	18	22	11	10		RM624-2Z	5	2.5	
	30		6	19	28	32	16	11	5	RM626-2Z	6		3
	20		4	13	17	22	11	10		RM624-2Z	5	3	
	30	1.6	6	19	27	32	16		RM626-2Z	6	2.5		
	40		10	26	37	42	23	14	6	R6000-2Z	8	3	
	45				42	47				R6000-2Z	8	3	
	23			15	19	25	13		7	RM696-2Z	5	4	
	28		6	19	24	30	16	13		RM626-2Z	6	3.5	
	30	2.1			26	32			8	RM626-2Z	6	3.5	4
	40				36	42				RM626-2Z	6	3.5	
	45		10	26	41	47	23	14		R6000-2Z	8	3	
	48				44	50			9	RM698-2Z	6	4.5	
	28		8	19	23	30	16	15		RM69/8-2Z	6	4.5	
	40	2.6	10	26	35	42	23		10	R6000-2Z	8	4	5
	50		12	32	45	52	27	16		R6201-2Z	10	3	
	28		6	19	22	30	16	17		RM626-2Z	6	5.5	
	38		10	26	32	40	23		11	R6000-2Z	8	5	
	48				42	50				R6000-2Z	8	5	
	50	3.1			44	52			12	R6201-2Z	10	4	6
60		12	32	54	62	27	18	R6201-2Z		10	4		
75				69	77			13	R6201-2Z	10	4		
100				94	102				R6201-2Z	10	4		
50		12	32	42	52	27		14	R6201-2Z	10	5.5	8	
60	4.1	15	35	52	62	30	21		R6202-2Z	11	5		
100		15	35	92	102	30		15	R6202-2Z	11	5	10	
60				50	62				R6202-2Z	11	5		
100	5.1	15	35	90	102	30	25		R6202-2Z	11	7		
140				130	142				R6202-2Z	11	7		



④追加加工类型	外径缩短	
代号	DS	
示例图		
详细信息	切割外圆减少外径尺寸	
	皮带半径/R	
	适用规格	DS
	1.1	D+0.8
	1.6	D+1.2
2.1	D+1.6	
2.6	D+1.8	
仅适用于R=1.1-1.6-2.1-2.6的产品外圆切割的加工面可能不进行表面处理		
指定方法	DS	

E1
惰皮带
惰轮