

钳制器辅助垫片

窄型



■窄型




代码	[M] 材质	[S] 表面处理
GFDN	Q195	黑色氧化膜
GFDNS	铝合金	阳极氧化处理

▲和导向轴制动钳配合使用，使制动钳使高度与滑轨一致。

订购编号示例

①代号 - ②导轨尺寸 - ③H
GFDN - 15 - 2

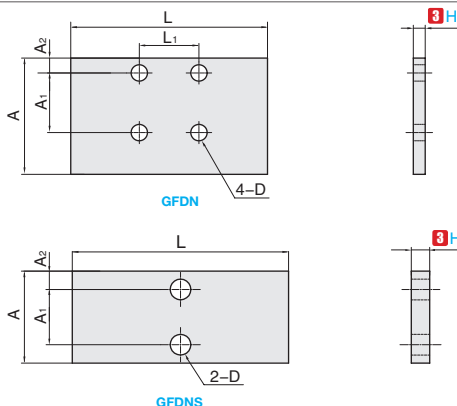

①代号	②导轨尺寸	③H	L	L ₁	A	A ₁	A ₂	D	质量 (kg)		
GFDN	15	2	47	17	25	17	4	4.5	0.018		
		3	47	17	25	17	4	4.5	0.026		
		4	47	17	25	17	4	4.5	0.04		
		4S	47	38	29	20	4.5	5.5	0.04		
	20	6	4	47	17	25	17	4	4.5	0.06	
			1	60	15	24	15	4.5	5.5	0.011	
		2	2	60	15	24	15	4.5	5.5	0.02	
			4	60	15	24	15	4.5	5.5	0.02	
			25	1	70	20	30	20	5	6.5	0.015
				2	70	20	30	20	5	6.5	0.03
	3	70		20	30	20	5	6.5	0.13		
	4	70		20	30	20	5	6.5	0.07		
	30	6	6	70	20	30	20	5	6.5	0.1	
			7	70	20	30	20	5	6.5	0.12	
		8	8	70	20	30	20	5	6.5	0.13	
			3	90	22	39	22	8.5	6.5	0.08	
			4	4	90	22	39	22	8.5	6.5	0.11
				7	90	22	39	22	8.5	6.5	0.19
	45	8	8	120	26	44	26	9	10.5	0.32	
			10	120	26	44	26	9	10.5	0.38	
18		18	120	26	44	26	9	10.5	0.7		
		55	4	140	30	49	30	9.5	14.5	0.2	
7	140		30	49	30	9.5	14.5	0.34			
10	140		30	49	30	9.5	14.5	0.5			
14	140		30	49	30	9.5	14.5	0.68			
65	17	17	140	30	49	30	9.5	14.5	0.83		
		10	170	35	64	35	14.5	16.5	0.78		
GFDNS	15	2	47	-	20	12	4	4.5	0.005		
		4	47	-	20	12	4	4.5	0.01		
		6	47	-	20	12	4	4.5	0.015		
	20	2	63	-	24	15	4.5	5.5	0.008		
		4	63	-	24	15	4.5	5.5	0.016		
	25	2	70	-	28	20	4	5.5	0.011		
		4	70	-	28	20	4	5.5	0.022		
		6	70	-	28	20	4	5.5	0.033		
		8	70	-	28	20	4	5.5	0.044		
	30	3	90	-	34	22	6	6.5	0.025		
		6	90	-	34	22	6	6.5	0.05		
	35	4	100	-	34	22	6	6.5	0.039		
		7	100	-	34	22	6	6.5	0.064		
		11	100	-	34	22	6	6.5	0.1		
14		100	-	34	22	6	6.5	0.129			