


圆形截面圆柱形拉伸弹簧

中载型

■中载型



① 代号		类型	④ 材质
ESDJP	平行向	中载型	SWP-A
ESDJC	垂直向		SUS304-WPB
ESDHP	平行向		
ESDHC	垂直向		

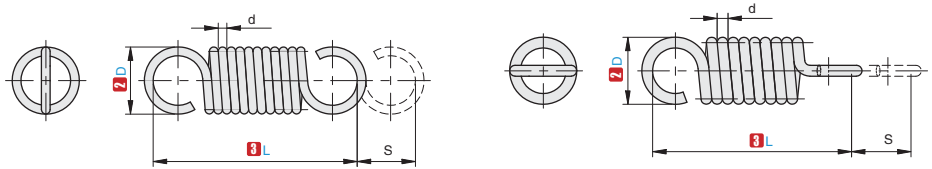

订购编号示例

① 代号	-	② D	-	③ L
ESDJP	-	D2	-	L10

ESDJP
ESDHP
平行向

ESDJC
ESDHC
垂直向

① 代号	② D	③ L	d	动态负载时		(初拉力) (N)	弹簧系数 (N/mm)
				工作行程 S (mm)	工作极限载荷 (N)		
ESDJP ESDHP	2	10	0.3	3.80	3.53	0.69	0.75
		15		6.70			0.42
		20		9.60			0.30
		25		12.60			0.23
ESDJP ESDHP ESDJC ESDHC (括号内尺寸仅限 ESDJP、ESDHP)	3	10	0.4	3.50	4.41	0.88	0.98
		15		6.00			0.59
		20		9.00			0.39
		25		12.00			0.29
	4	15	0.5	6.50	6.37	1.18	0.78
		20		10.20			0.49
		25		13.90			0.39
		30		17.50			0.29
		35		20.30			0.26
		40		24.00			0.22
	5	15	0.6	5.60	8.53	1.57	1.27
		20		8.90			0.78
		25		13.70			0.49
		30		17.30			0.39
		35		23.70			0.29
		40		24.50			0.28
	6	45	0.8	28.40	17.26	3.53	0.25
		50		32.20			0.22
		20		6.70			2.06
		25		9.30			1.47
30		12.70		1.08			
35		15.60		0.88			
40		18.70		0.69			
45		20.60		0.68			
8	50	1	24.50	24.52	4.90	0.57	
	55		28.00			0.50	
	60		29.70			0.47	
	25		9.10			2.16	
	30		12.50			1.57	
	35		15.40			1.27	
	40		19.20			0.98	
	45		22.20			0.88	
	50		25.00			0.78	
	55		28.60			0.70	
60	33.30	0.60					
65	36.30	0.55					
70	40.00	0.50					

J2
弹
簧

分类
目录



返回
主目录



圆形截面圆柱形拉伸弹簧

中载型

① 代号	② D	③ L	d	动态负载时		(初拉力) (N)	弹簧系数 (N/mm)							
				工作行程 S (mm)	工作极限载荷 (N)									
ESDJP ESDHP ESDJC ESDHC (括号内尺寸仅限 ESDJP、 ESDHP)	10	1.2	1.2	30	10.40	30.99	5.49	2.45						
				35	13.70			1.86						
				40	17.30			1.47						
				45	20.00			1.27						
				50	24.80			0.98						
				55	28.20			0.88						
				60	31.60			0.78						
				65	34.20			0.76						
				70	38.80			0.67						
				75	43.30			0.60						
	ESDJP ESDHP	12	1.6	1.6	35	8.50	62.76	14.71	5.69					
					40	11.80			4.12					
					45	14.30			3.33					
					50	16.80			2.84					
					55	19.30			2.45					
					60	22.30			2.16					
					65	24.50			1.96					
					70	27.20			1.77					
					75	28.80			1.67					
					80	32.70			1.47					
ESDJP ESDHP	14	1.8	1.8	40	10.20	74.53	16.67	5.69						
				45	13.10			4.41						
				50	16.40			3.53						
				55	19.70			2.94						
				60	21.10			2.75						
				65	24.60			2.35						
				70	27.60			2.06						
				75	31.10			1.86						
				80	32.80			1.77						
				90	37.50			1.60						
				100	42.80			1.40						
				125	60.00			1.00						
				ESDJP ESDHP	16			2.1 (仅限 SUS304- SWPB)	2.1	45	11.70	86.30	19.61	5.69
										50	15.10			4.41
55	17.40	3.82												
60	21.30	3.14												
65	23.40	2.84												
70	26.80	2.45												
75	29.60	2.26												
80	32.70	2.10												
90	37.80	1.77												
100	45.30	1.47												
125	56.70	1.20												
150	71.50	0.95												
ESDJP	18	2.3	2.3			50	12.50			115.72	27.46			7.06
						55	15.00							5.88
				60	17.30	5.10								
				65	20.00	4.41								
				70	22.50	3.92								
				75	25.00	3.53								
				80	29.00	3.04								
				90	33.60	2.65								
	ESDJP	20	2.6	2.6	100	39.10	150.04	36.28	2.26					
					125	53.00			1.70					
					150	64.20			1.40					
					60	14.70			7.75					
					70	20.00			5.69					
					80	25.20			4.51					
ESDJP	20	2.6	2.6	90	30.80	150.04	36.28	3.73						
				100	36.10			3.14						
				125	48.30			2.35						
				150	59.50			1.95						
				175	72.50			1.60						

① 代号	② D	③ L	d	动态负载时		(初拉力) (N)	弹簧系数 (N/mm)	
				工作行程 S (mm)	工作极限载荷 (N)			
ESDJP	24	3.2	3.2	70	14.70	225.55	56.88	11.47
				80	20.70			8.14
				90	24.90			6.77
				100	29.70			5.69
				125	41.00			4.12
				150	50.60			3.40
				175	61.40			2.80
				200	74.70			2.30

▲ 初拉力、弹簧系数为参考值。载荷 (kgf) = 载荷 N × 0.101972

J2
弹
簧

分类
目录



返回
主目录

