



D1 拖链



★ 产品特点：卯榫结构，高稳定性，较大内高。





① 代号	类型	内高	打开方式	横梁	材质	颜色	容许温度	阻燃等级
DET60L	一般用 高品质型·60系列	60	内外径打开	桥式	改性增强尼龙6	黑色	-40°~120°	UL94-HB
DEU60L				封闭式				
DEV60W				封闭式				

- ▲ 实际安装高度: HF=H+50mm
- ▲ 内高=60 mm, 节距=91 mm/链节, 每米链节数=11节, 拖链长度=S/2 + K
- ▲ C型槽和扎线板默认安装位置: A1
- ▲ 示例: DET60L-75-R135-N20-JE60E

架空应用-短行程

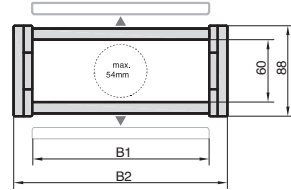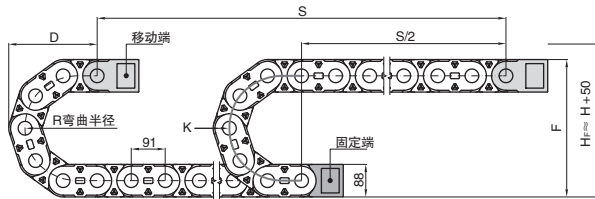

滑行应用-长行程

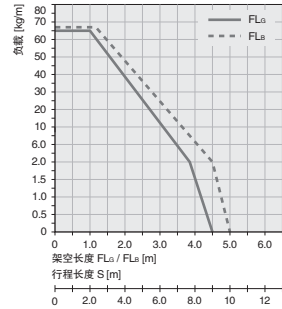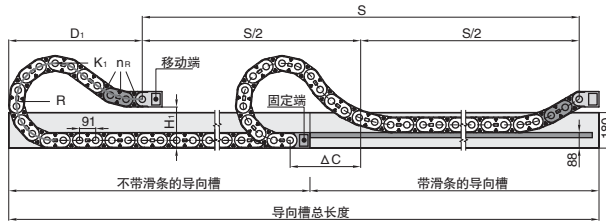

① 代号 - ② 内宽B1 - ③ 弯曲半径R - ④ 链节数N - ⑤ 接头
 DET60L - 75 - R150 - N20 - JE60E



① 代号 - ② 内宽B1 - ③ 弯曲半径R - ④ 链节数N - ⑤ 接头 - ⑥ 分隔片 - ⑦ C型槽 - ⑧ 扎线板 - ⑨ 安装方式
 DET60L - 75 - R150 - N20 - JE60E - DEF60GB-75 - DEC60C-83 - DEZ60Z-7 - A1

① 代号	② 内宽B1	③ 弯曲半径R	④ 链节数N	⑤ 接头				节距P	最大电缆直径 (mm)	内高H1	外高H2	外宽B2	架空应用-短行程				滑行应用-长行程				架空负载 (kg/m)	架空行程 (m)	重量 kg/m
				桥式-活动式	桥式-固定式	封闭式-活动式	封闭式-固定式						HF	H	D	K	H1	D1	K1	△C			
DET60L DEU60L DEV60W	75	135	1-	JE60E	JE60F	JE60G	JE60K	91	50	60	88	109	408	358	316	610	270	316	610	-	-		
		438											388	331	655	264	500	819	210	2			
		488											438	356	735	264	560	910	240	2			
		538											488	381	815	264	690	1092	335	2			
		638											588	431	970	264	850	1365	455	3			
		738											688	481	1125	264	1080	1729	630	3			
	100	838										788	531	1285	264	1390	2184	890	3				
		938										888	581	1440	264	1460	2457	920	4				
		1038										988	631	1600	264	1770	2912	1180	4				
		1138										1088	681	1755	264	2090	3276	1450	4				
		125										408	358	316	610	270	316	610	-	-			
												438	388	331	655	264	500	819	210	2			
488	438		356	735	264	560	910	240	2														
538	488		381	815	264	690	1092	335	2														
638	588		431	970	264	850	1365	455	3														
738	688		481	1125	264	1080	1729	630	3														
159	838	788	531	1285	264	1390	2184	890	3														
	938	888	581	1440	264	1460	2457	920	4														
	1038	988	631	1600	264	1770	2912	1180	4														
	1138	1088	681	1755	264	2090	3276	1450	4														
	408	358	316	610	270	316	610	-	-														
	438	388	331	655	264	500	819	210	2														
488	438	356	735	264	560	910	240	2															
538	488	381	815	264	690	1092	335	2															
638	588	431	970	264	850	1365	455	3															
738	688	481	1125	264	1080	1729	630	3															
838	788	531	1285	264	1390	2184	890	3															
938	888	581	1440	264	1460	2457	920	4															
1038	988	631	1600	264	1770	2912	1180	4															
1138	1088	681	1755	264	2090	3276	1450	4															



爱安特自制模组, 火爆开售! 全零件备库, 最快5个工作日出货!



400-6699-428



www.ant-fa.com