



★ 产品特点：舌榫结构，高稳定性，较大内高。



D1
拖链





①代号	类型	内高	打开方式	横梁	材质	颜色	容许温度	阻燃等级
DEW80L DEY80L DEZ80W	一般用 高品质型·80系列	80	内外径打开	桥式 封闭式	改性增强 尼龙6	黑色	-40°~120°	UL94-HB

- ▲ 实际安装高度: HF=H+60mm
- ▲ 内高=80 mm, 节距=111 mm/链节, 每米链节数=9节, 拖链长度=S/2 + K
- ▲ 示例: DEW80L-75-R150-N20-JE80E

架空应用-短行程

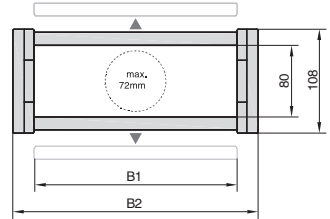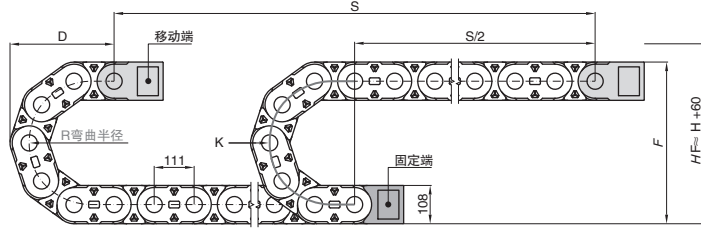

滑行应用-长行程

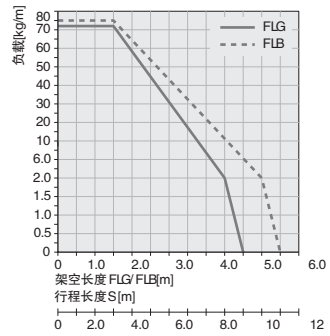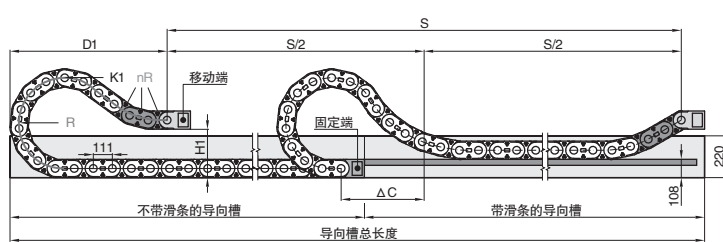

①代号 - ②内宽B1 - ③弯曲半径R - ④链节数N - ⑤接头
DEW80L - 75 - R150 - N20 - JE80E



①代号 - ②内宽B1 - ③弯曲半径R - ④链节数N - ⑤接头 - ⑥分隔片 - ⑦C型槽 - ⑧扎线板
DEW80L - 75 - R150 - N20 - JE80E - DEF80GB-75 - DEC80C-83 - DEZ80Z-7

①代号	②内宽B1	③弯曲半径R	④链节数N	⑤接头				钢接头-桥式-活动式	钢接头-桥式-固定式	节距P	最大电缆直径(mm)	内高H1	外高H2	外宽B2	架空应用-短行程				滑行应用-长行程				架空行程(m)	重量kg/m		
				桥式-活动式	桥式-固定式	封闭式-活动式	封闭式-固定式								HF	H	D	K	H1	D1	K1	ΔC			nR	
DEW80L DEY80L DEZ80W	(75)	150	1-	JE80E	JE80F	JE80G	JE80K	JE80L	JE80M	111	72	80	108	125	468	408	371	695	300	371	695	-	-	≤30	≤350	≈6.30
		518													458	396	775	350	396	775	-	-				
		568													508	421	855	324	650	999	275	2				
		668													608	471	1010	324	840	1332	415	2				
		768													708	521	1165	324	1020	1665	550	3				
		868													808	571	1325	324	1290	1998	760	3				
		968													908	621	1480	324	1550	2442	980	3				
		1068													1008	671	1640	324	1630	2664	1010	4				
		1168													1108	721	1795	324	1890	3108	1220	4				
		1368													1308	821	2110	324	2530	3996	1760	4				
		468													408	371	695	300	371	695	-	-				
		518													458	396	775	350	396	775	-	-				
	568	508	421	855	324	650	999	275	2																	
	668	608	471	1010	324	840	1332	415	2																	
	768	708	521	1165	324	1020	1665	550	3																	
	868	808	571	1325	324	1290	1998	760	3																	
	968	908	621	1480	324	1550	2442	980	3																	
	1068	1008	671	1640	324	1630	2664	1010	4																	
	1168	1108	721	1795	324	1890	3108	1220	4																	
	1368	1308	821	2110	324	2530	3996	1760	4																	
	468	408	371	695	300	371	695	-	-																	
	518	458	396	775	350	396	775	-	-																	
	568	508	421	855	324	650	999	275	2																	
	668	608	471	1010	324	840	1332	415	2																	
768	708	521	1165	324	1020	1665	550	3																		
868	808	571	1325	324	1290	1998	760	3																		
968	908	621	1480	324	1550	2442	980	3																		
1068	1008	671	1640	324	1630	2664	1010	4																		
1168	1108	721	1795	324	1890	3108	1220	4																		
1368	1308	821	2110	324	2530	3996	1760	4																		
468	408	371	695	300	371	695	-	-																		
518	458	396	775	350	396	775	-	-																		
568	508	421	855	324	650	999	275	2																		
668	608	471	1010	324	840	1332	415	2																		
768	708	521	1165	324	1020	1665	550	3																		
868	808	571	1325	324	1290	1998	760	3																		
968	908	621	1480	324	1550	2442	980	3																		
1068	1008	671	1640	324	1630	2664	1010	4																		
1168	1108	721	1795	324	1890	3108	1220	4																		
1368	1308	821	2110	324	2530	3996	1760	4																		

