

# 悬臂销 法兰安装 外螺纹型




大批量  
订购  
bulk order

## ■ 法兰安装 外螺纹型



① 代号	④ 材质	⑤ 表面处理	⑥ 附件
CSFBG	45#	四氧化三铁保护膜	挡圈
CSFEG		无电解镀锌	不锈钢
CSFNG	SUS304	无	

产品特点: 侧板螺母安装, 零件侧内螺纹紧固, 承载较高。

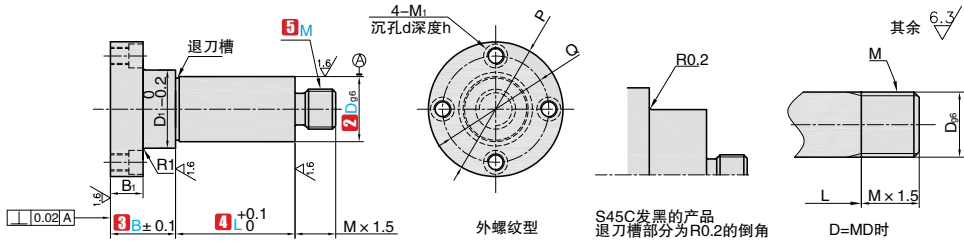

### 订购编号示例

① 代号	-	② No	-	③ B	-	④ L	-	⑤ M	-	⑥ 追加工代码
CSFBG	-	17	-	B17	-	L17	-	M16	-	GP

① 代号	② No	轴径		指定单位 1mm		⑤ M(粗牙)	D <sub>1</sub>	P	B <sub>1</sub>	M <sub>1</sub> (粗牙)	d	h	Q
		D	公差 g6	③ B	④ L								
CSFBG CSFEG CSFNG	6	6	-0.004	12 ~ 60	5 ~ 100	4 5 6	8	26	10	M 4	6.5	3.5	17
	6A		-0.012			32		23					
	8		28			19							
	8A	8	-0.005			5 6 8	36	M 5			8	4.4	26
	10		-0.014			32	M 4	6.5			3.5	23	
	10A		40			30							
	12	12	-0.006		10 ~ 150	6 8 10 12	15	36		M 5	8	4.4	30
	13	13				16	38	27					
	15	15				18	40	31					
	16	16				19	42	32					
	17	17				20	44	32					
	18	18				21	46	34					
	20	20	-0.007		17 ~ 75	10 12 15 16 20	24	48		M 6	9.5	5.4	39
	22	22				26	50	42					
	25	25				29	54	42					
	30	30				34	62	49					
	35	35				39	70	55					
	40	40				44	80	63					
50	50	-0.009	20 ~ 75	12 15 16 20 24 25 30	44	80	M 8	11	6.5	49			
		-0.025		39	70	55							
					54	90	M10	14	9	73			

▲ B+L ≤ 100。

▲ 有关外螺纹的退刀槽尺寸参见外螺纹退刀槽加工尺寸表。



追加工类型	嵌入部加工				粗牙螺纹				细牙螺纹			
	⑥ 追加工代码		MSP		螺纹直径 (M)	K	T	R	螺纹直径 (MSP)	K	T	R
示例图					3	1.2~1.5	0.2~0.3	2.1~2.4	3	1.2~1.5	0.2~0.3	2.1~2.4
					4			2.9~3.2	4			2.9~3.2
5	3.9~4.1	5	3.9~4.1									
详细说明	在底座面部分追加嵌入部加工		将外螺纹部 MD 变更为下表所示的细牙螺纹		6	1.5~2.5	0.2~0.6	4.3~4.9	6	1.5~2.5	0.2~0.6	4.3~4.9
					8			6.3~6.6	8			6.3~6.6
					10			8.1~8.3	10			8.3~8.6
					12			9.8~10.1	12			9.8~10.7
					16			13.6~13.8	15			13.6~13.8
					20			17.0~17.2	20			17.0~18.8
					24	20.2~20.7	25	20.2~23.7				
30	26.0~26.2	30	26.0~28.2									
指定方法	GP		MSP									