





支脚



★ 产品特点: 螺杆与底座可进行转动, 用于不平衡地面; 螺杆高度可通过一体六方调节。

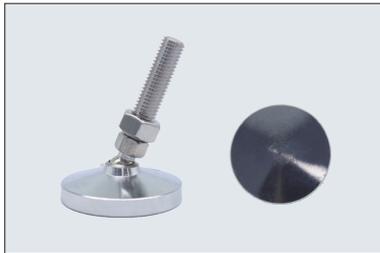

①代号	底盘		螺杆		橡胶垫
	M材质	M材质	S表面处理	S表面处理	
SFBCMWC	45#	45#	镀铬		无
SFSMWC	SUS304	SUS304	无		
SFBCMWR	45#	45#	镀铬		丁腈橡胶(NBR)
SFSMWRA	SUS304	SUS304	无		

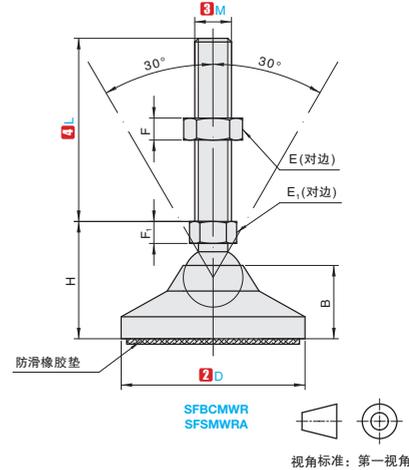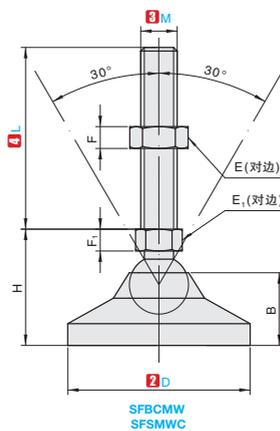

①代号 - ②底径 - ③螺纹直径 - ④螺纹长度
SFBCMWC - D60 - M16 - L50

①代号	型号		主要尺寸							承载(kg)	参考重量(kg/pcs)
	②D	③M	④L	E	E ₁	H	B	F ₁	F		
碳钢 SFBCMWC SFBCMWR (带胶垫) 不锈钢 SFSMWC SFSMWRA (带胶垫)	50	M10	50	17	14	34	20	8	8	800	0.21
			100								0.28
		M12	50	1000						0.31	
			100	1000						0.39	
	60	M12	50	19	19	26	10	10	1000	0.39	
			100							0.51	
		M16	50	1200					0.49		
			100	1200					0.52		
	80	M16	50	24	24	44	13	13	1200	0.59	
			100							0.81	
		M20	50	3000					0.85		
			100	3000					0.92		
100	M16	50	24	30	30	16	16	1200	0.89		
		100							1.01		
	M20	50	3000					1.11			
		100	3000					1.11			

▲ 承载与参考重量仅供参考。
▲ 螺杆倾斜角度请勿超过图纸参数, 防止出现螺杆与底座脱落。

交货期	数量分类	小单	中大单	大单
	数量	1~50	51~100	101~
	交货期	通常	7工作日	现询

优惠价	数量	1-9	10~
	价格	100%	另行报价

