


Excellent vibration dampening – iglidur® M250



Order key for round bars

Type	Dimensions [mm]
------	-----------------

SF R M250-30 00-500

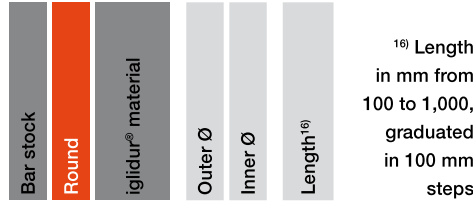

Dimensions [mm]

Ø	Lengths ¹⁶⁾	Part No.
10	100–1,000	SFRM250-1000-□ ¹⁶⁾
15	100–1,000	SFRM250-1500-□ ¹⁶⁾
20	100–1,000	SFRM250-2000-□ ¹⁶⁾
25	100–1,000	SFRM250-2500-□ ¹⁶⁾
30	100–1,000	SFRM250-3000-□ ¹⁶⁾
35	100–1,000	SFRM250-3500-□ ¹⁶⁾
40	100–1,000	SFRM250-4000-□ ¹⁶⁾

Ø	Lengths ¹⁶⁾	Part No.
45	100–1,000	SFRM250-4500-□ ¹⁶⁾
50	100–1,000	SFRM250-5000-□ ¹⁶⁾
55	100–1,000	SFRM250-5500-□ ¹⁶⁾
60	100–1,000	SFRM250-6000-□ ¹⁶⁾
65	100–1,000	SFRM250-6500-□ ¹⁶⁾
80	100–1,000	SFRM250-8000-□ ¹⁶⁾
100	100–1,000	SFRM250-10000-□ ¹⁶⁾


Good coefficients of friction and wear on almost every shaft – iglidur® P210



Order key for round bars

Type	Dimensions [mm]
------	-----------------

SF R P210-30 00-500

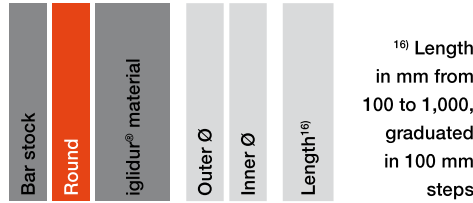

Dimensions [mm]

Ø	Lengths ¹⁶⁾	Part No.
10	100–1,000	SFRP210-1000-□ ¹⁶⁾
15	100–1,000	SFRP210-1500-□ ¹⁶⁾
20	100–1,000	SFRP210-2000-□ ¹⁶⁾
25	100–1,000	SFRP210-2500-□ ¹⁶⁾
30	100–1,000	SFRP210-3000-□ ¹⁶⁾
35	100–1,000	SFRP210-3500-□ ¹⁶⁾
40	100–1,000	SFRP210-4000-□ ¹⁶⁾

Ø	Lengths ¹⁶⁾	Part No.
45	100–1,000	SFRP210-4500-□ ¹⁶⁾
50	100–1,000	SFRP210-5000-□ ¹⁶⁾
55	100–1,000	SFRP210-5500-□ ¹⁶⁾
60	100–1,000	SFRP210-6000-□ ¹⁶⁾
65	100–1,000	SFRP210-6500-□ ¹⁶⁾
80	100–1,000	SFRP210-8000-□ ¹⁶⁾
100	100–1,000	SFRP210-10000-□ ¹⁶⁾

Available from stock
Produced to special order


Wear resistant and cost-effective – iglidur® J4



Order key for round bars

Type	Dimensions [mm]
------	-----------------

SF R J4-30 00-500

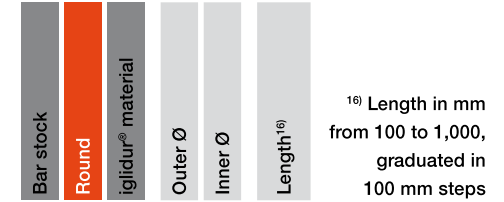

Dimensions [mm]

Ø	Lengths ¹⁶⁾	Part No.
10	100–1,000	SFRJ4-1000-□ ¹⁶⁾
15	100–1,000	SFRJ4-1500-□ ¹⁶⁾
20	100–1,000	SFRJ4-2000-□ ¹⁶⁾
25	100–1,000	SFRJ4-2500-□ ¹⁶⁾
30	100–1,000	SFRJ4-3000-□ ¹⁶⁾
35	100–1,000	SFRJ4-3500-□ ¹⁶⁾
40	100–1,000	SFRJ4-4000-□ ¹⁶⁾

Ø	Lengths ¹⁶⁾	Part No.
45	100–1,000	SFRJ4-4500-□ ¹⁶⁾
50	100–1,000	SFRJ4-5000-□ ¹⁶⁾
55	100–1,000	SFRJ4-5500-□ ¹⁶⁾
60	100–1,000	SFRJ4-6000-□ ¹⁶⁾
65	100–1,000	SFRJ4-6500-□ ¹⁶⁾
80	100–1,000	SFRJ4-8000-□ ¹⁶⁾
100	100–1,000	SFRJ4-10000-□ ¹⁶⁾


Low-cost material for high quantities – iglidur® GLW



Order key for round bars

Type	Dimensions [mm]
------	-----------------

SF R GLW-30 00-500

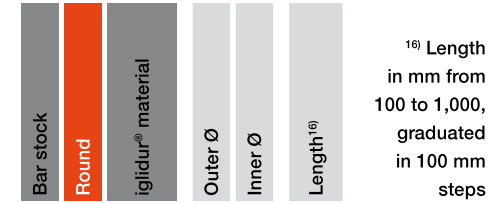

Dimensions [mm]

Ø	Lengths ¹⁶⁾	Part No.
10	100–1,000	SFRGLW-1000-□ ¹⁶⁾
15	100–1,000	SFRGLW-1500-□ ¹⁶⁾
20	100–1,000	SFRGLW-2000-□ ¹⁶⁾
25	100–1,000	SFRGLW-2500-□ ¹⁶⁾
30	100–1,000	SFRGLW-3000-□ ¹⁶⁾
35	100–1,000	SFRGLW-3500-□ ¹⁶⁾
40	100–1,000	SFRGLW-4000-□ ¹⁶⁾

Ø	Lengths ¹⁶⁾	Part No.
45	100–1,000	SFRGLW-4500-□ ¹⁶⁾
50	100–1,000	SFRGLW-5000-□ ¹⁶⁾
55	100–1,000	SFRGLW-5500-□ ¹⁶⁾
60	100–1,000	SFRGLW-6000-□ ¹⁶⁾
65	100–1,000	SFRGLW-6500-□ ¹⁶⁾
80	100–1,000	SFRGLW-8000-□ ¹⁶⁾
100	100–1,000	SFRGLW-10000-□ ¹⁶⁾

igus® constantly expands its range of available materials and dimensions. Please contact us in case the required diameter is not available.


The versatile endurance runner – iglidur® J



Order key for round bars

Type	Dimensions [mm]
------	-----------------

SF R J - 30 00-500



¹⁶⁾ Length in mm from 100 to 1,000, graduated in 100 mm steps

Dimensions [mm]

Ø	Lengths ¹⁶⁾	Part No.
10	100–1,000	SFRJ-1000-□ ¹⁶⁾
15	100–1,000	SFRJ-1500-□ ¹⁶⁾
20	100–1,000	SFRJ-2000-□ ¹⁶⁾
25	100–1,000	SFRJ-2500-□ ¹⁶⁾
30	100–1,000	SFRJ-3000-□ ¹⁶⁾
35	100–1,000	SFRJ-3500-□ ¹⁶⁾
40	100–1,000	SFRJ-4000-□ ¹⁶⁾

Ø	Lengths ¹⁶⁾	Part No.
45	100–1,000	SFRJ-4500-□ ¹⁶⁾
50	100–1,000	SFRJ-5000-□ ¹⁶⁾
55	100–1,000	SFRJ-5500-□ ¹⁶⁾
60	100–1,000	SFRJ-6000-□ ¹⁶⁾
65	100–1,000	SFRJ-6500-□ ¹⁶⁾
80	100–1,000	SFRJ-8000-□ ¹⁶⁾
100	100–1,000	SFRJ-10000-□ ¹⁶⁾


The classic endurance runner up to 30 MPa – iglidur® W300



Order key for round bars

Type	Dimensions [mm]
------	-----------------

SF R W300-30 00-500



¹⁶⁾ Length in mm from 100 to 1,000, graduated in 100 mm steps

Dimensions [mm]

Ø	Lengths ¹⁶⁾	Part No.
10	100–1,000	SFRW-1000-□ ¹⁶⁾
15	100–1,000	SFRW-1500-□ ¹⁶⁾
20	100–1,000	SFRW-2000-□ ¹⁶⁾
25	100–1,000	SFRW-2500-□ ¹⁶⁾
30	100–1,000	SFRW-3000-□ ¹⁶⁾
35	100–1,000	SFRW-3500-□ ¹⁶⁾
40	100–1,000	SFRW-4000-□ ¹⁶⁾

Ø	Lengths ¹⁶⁾	Part No.
45	100–1,000	SFRW-4500-□ ¹⁶⁾
50	100–1,000	SFRW-5000-□ ¹⁶⁾
55	100–1,000	SFRW-5500-□ ¹⁶⁾
60	100–1,000	SFRW-6000-□ ¹⁶⁾
65	100–1,000	SFRW-6500-□ ¹⁶⁾
80	100–1,000	SFRW-8000-□ ¹⁶⁾
100	100–1,000	SFRW-10000-□ ¹⁶⁾

Available from stock
Produced to special order

620 Product finder online ► www.igus.eu/barstock-finder




Specialist for pulsating loads – iglidur® J3



Order key for round bars

Type	Dimensions [mm]
------	-----------------

SF R J3 - 30 00-500



¹⁶⁾ Length in mm from 100 to 1,000, graduated in 100 mm steps

Dimensions [mm]

Ø	Lengths ¹⁶⁾	Part No.
10	100–1,000	SFRJ3-1000-□ ¹⁶⁾
15	100–1,000	SFRJ3-1500-□ ¹⁶⁾
20	100–1,000	SFRJ3-2000-□ ¹⁶⁾
25	100–1,000	SFRJ3-2500-□ ¹⁶⁾
30	100–1,000	SFRJ3-3000-□ ¹⁶⁾
35	100–1,000	SFRJ3-3500-□ ¹⁶⁾
40	100–1,000	SFRJ3-4000-□ ¹⁶⁾

Ø	Lengths ¹⁶⁾	Part No.
45	100–1,000	SFRJ3-4500-□ ¹⁶⁾
50	100–1,000	SFRJ3-5000-□ ¹⁶⁾
55	100–1,000	SFRJ3-5500-□ ¹⁶⁾
60	100–1,000	SFRJ3-6000-□ ¹⁶⁾
65	100–1,000	SFRJ3-6500-□ ¹⁶⁾
80	100–1,000	SFRJ3-8000-□ ¹⁶⁾
100	100–1,000	SFRJ3-10000-□ ¹⁶⁾


Endurance runner with high dimensional stability at high temperature – iglidur® J350



Order key for round bars

Type	Dimensions [mm]
------	-----------------

SF R J350 - 30 00-500



¹⁶⁾ Length in mm from 100 to 1,000, graduated in 100 mm steps

Dimensions [mm]

Ø	Lengths ¹⁶⁾	Part No.
10	100–1,000	SFRJ350-1000-□ ¹⁶⁾
15	100–1,000	SFRJ350-1500-□ ¹⁶⁾
20	100–1,000	SFRJ350-2000-□ ¹⁶⁾
25	100–1,000	SFRJ350-2500-□ ¹⁶⁾
30	100–1,000	SFRJ350-3000-□ ¹⁶⁾
35	100–1,000	SFRJ350-3500-□ ¹⁶⁾
40	100–1,000	SFRJ350-4000-□ ¹⁶⁾

Ø	Lengths ¹⁶⁾	Part No.
45	100–1,000	SFRJ350-4500-□ ¹⁶⁾
50	100–1,000	SFRJ350-5000-□ ¹⁶⁾
55	100–1,000	SFRJ350-5500-□ ¹⁶⁾
60	100–1,000	SFRJ350-6000-□ ¹⁶⁾
65	100–1,000	SFRJ350-6500-□ ¹⁶⁾
80	100–1,000	SFRJ350-8000-□ ¹⁶⁾
100	100–1,000	SFRJ350-10000-□ ¹⁶⁾

iglus® constantly expands its range of available materials and dimensions. Please contact us in case the required diameter is not available.



Service life calculation online ► www.igus.eu/barstock-expert 621

Ideal for plastic shafts – iglidur® J260



Order key for round bars

Type	Dimensions [mm]
------	-----------------

SF R J260 -30 00-500

Bar stock	Round	iglidur® material	Outer Ø	Inner Ø	Length ¹⁶⁾
-----------	-------	-------------------	---------	---------	-----------------------

¹⁶⁾ Length in mm from 100 to 1,000, graduated in 100 mm steps

Dimensions [mm]

Ø	Lengths ¹⁶⁾	Part No.
10	100–1,000	SFRJ260-1000-□ ¹⁶⁾
15	100–1,000	SFRJ260-1500-□ ¹⁶⁾
20	100–1,000	SFRJ260-2000-□ ¹⁶⁾
25	100–1,000	SFRJ260-2500-□ ¹⁶⁾
30	100–1,000	SFRJ260-3000-□ ¹⁶⁾
35	100–1,000	SFRJ260-3500-□ ¹⁶⁾
40	100–1,000	SFRJ260-4000-□ ¹⁶⁾

Ø	Lengths ¹⁶⁾	Part No.
45	100–1,000	SFRJ260-4500-□ ¹⁶⁾
50	100–1,000	SFRJ260-5000-□ ¹⁶⁾
55	100–1,000	SFRJ260-5500-□ ¹⁶⁾
60	100–1,000	SFRJ260-6000-□ ¹⁶⁾
65	100–1,000	SFRJ260-6500-□ ¹⁶⁾
80	100–1,000	SFRJ260-8000-□ ¹⁶⁾
100	100–1,000	SFRJ260-10000-□ ¹⁶⁾

Low-cost – iglidur® R



Order key for round bars

Type	Dimensions [mm]
------	-----------------

SF R R -30 00-500

Bar stock	Round	iglidur® material	Outer Ø	Inner Ø	Length ¹⁶⁾
-----------	-------	-------------------	---------	---------	-----------------------

¹⁶⁾ Length in mm from 100 to 1,000, graduated in 100 mm steps

Dimensions [mm]

Ø	Lengths ¹⁶⁾	Part No.
10	100–1,000	SFRR-1000-□ ¹⁶⁾
15	100–1,000	SFRR-1500-□ ¹⁶⁾
20	100–1,000	SFRR-2000-□ ¹⁶⁾
25	100–1,000	SFRR-2500-□ ¹⁶⁾
30	100–1,000	SFRR-3000-□ ¹⁶⁾
35	100–1,000	SFRR-3500-□ ¹⁶⁾
40	100–1,000	SFRR-4000-□ ¹⁶⁾

Ø	Lengths ¹⁶⁾	Part No.
45	100–1,000	SFRR-4500-□ ¹⁶⁾
50	100–1,000	SFRR-5000-□ ¹⁶⁾
55	100–1,000	SFRR-5500-□ ¹⁶⁾
60	100–1,000	SFRR-6000-□ ¹⁶⁾
65	100–1,000	SFRR-6500-□ ¹⁶⁾
80	100–1,000	SFRR-8000-□ ¹⁶⁾
100	100–1,000	SFRR-10000-□ ¹⁶⁾

Available from stock
Produced to special order

Specially for aluminium shafts – iglidur® J200



Order key for round bars

Type	Dimensions [mm]
------	-----------------

SF R J200 -30 00-500

Bar stock	Round	iglidur® material	Outer Ø	Inner Ø	Length ¹⁶⁾
-----------	-------	-------------------	---------	---------	-----------------------

¹⁶⁾ Length in mm from 100 to 1,000, graduated in 100 mm steps

Dimensions [mm]

Ø	Lengths ¹⁶⁾	Part No.
10	100–1,000	SFRJ200-1000-□ ¹⁶⁾
15	100–1,000	SFRJ200-1500-□ ¹⁶⁾
20	100–1,000	SFRJ200-2000-□ ¹⁶⁾
25	100–1,000	SFRJ200-2500-□ ¹⁶⁾
30	100–1,000	SFRJ200-3000-□ ¹⁶⁾
35	100–1,000	SFRJ200-3500-□ ¹⁶⁾
40	100–1,000	SFRJ200-4000-□ ¹⁶⁾

Ø	Lengths ¹⁶⁾	Part No.
45	100–1,000	SFRJ200-4500-□ ¹⁶⁾
50	100–1,000	SFRJ200-5000-□ ¹⁶⁾
55	100–1,000	SFRJ200-5500-□ ¹⁶⁾
60	100–1,000	SFRJ200-6000-□ ¹⁶⁾
65	100–1,000	SFRJ200-6500-□ ¹⁶⁾
80	100–1,000	SFRJ200-8000-□ ¹⁶⁾
100	100–1,000	SFRJ200-10000-□ ¹⁶⁾

Extreme wear resistant in black – iglidur® JB



Order key for round bars

Type	Dimensions [mm]
------	-----------------

SF R JB-30 00-500

Bar stock	Round	iglidur® material	Outer Ø	Inner Ø	Length ¹⁶⁾
-----------	-------	-------------------	---------	---------	-----------------------

¹⁶⁾ Length in mm from 100 to 1,000, graduated in 100 mm steps

Dimensions [mm]

Ø	Lengths ¹⁶⁾	Part No.
10	100–1,000	SFRJB-1000-□ ¹⁶⁾
15	100–1,000	SFRJB-1500-□ ¹⁶⁾
20	100–1,000	SFRJB-2000-□ ¹⁶⁾
25	100–1,000	SFRJB-2500-□ ¹⁶⁾
30	100–1,000	SFRJB-3000-□ ¹⁶⁾
35	100–1,000	SFRJB-3500-□ ¹⁶⁾
40	100–1,000	SFRJB-4000-□ ¹⁶⁾

Ø	Lengths ¹⁶⁾	Part No.
45	100–1,000	SFRJB-4500-□ ¹⁶⁾
50	100–1,000	SFRJB-5000-□ ¹⁶⁾
55	100–1,000	SFRJB-5500-□ ¹⁶⁾
60	100–1,000	SFRJB-6000-□ ¹⁶⁾
65	100–1,000	SFRJB-6500-□ ¹⁶⁾
80	100–1,000	SFRJB-8000-□ ¹⁶⁾
100	100–1,000	SFRJB-10000-□ ¹⁶⁾

iglus® constantly expands its range of available materials and dimensions. Please contact us in case the required diameter is not available.


The chemical and temperature specialist – iglidur® X



Order key for round bars

Type	Dimensions [mm]
------	-----------------

SF R X - 30 00 - 500

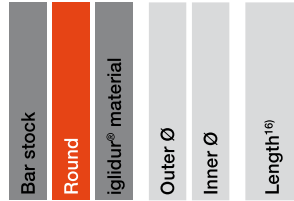

¹⁶) Length in mm
from 100 to 1,000,
graduated in
100 mm steps

Dimensions [mm]

Ø	Lengths¹⁶)	Part No.
10	100–1,000	SFRX-1000-□¹⁶)
15	100–1,000	SFRX-1500-□¹⁶)
20	100–1,000	SFRX-2000-□¹⁶)
25	100–1,000	SFRX-2500-□¹⁶)
30	100–1,000	SFRX-3000-□¹⁶)
35	100–1,000	SFRX-3500-□¹⁶)
40	100–1,000	SFRX-4000-□¹⁶)

Ø	Lengths¹⁶)	Part No.
45	100–1,000	SFRX-4500-□¹⁶)
50	100–1,000	SFRX-5000-□¹⁶)
55	100–1,000	SFRX-5500-□¹⁶)
60	100–1,000	SFRX-6000-□¹⁶)
65	100–1,000	SFRX-6500-□¹⁶)
80	100–1,000	SFRX-8000-□¹⁶)
100	100–1,000	SFRX-10000-□¹⁶)


All-rounder suitable for steam sterilisation – iglidur® HSD350



Order key for round bars

Type	Dimensions [mm]
------	-----------------

SF R HSD350-30 00 - 500



¹⁶) Length
in mm from
100 to 1,000,
graduated
in 100 mm
steps

Dimensions [mm]

Ø	Lengths¹⁶)	Part No.
10	100–1,000	SFRHSD350-1000-□¹⁶)
15	100–1,000	SFRHSD350-1500-□¹⁶)
20	100–1,000	SFRHSD350-2000-□¹⁶)
25	100–1,000	SFRHSD350-2500-□¹⁶)
30	100–1,000	SFRHSD350-3000-□¹⁶)
35	100–1,000	SFRHSD350-3500-□¹⁶)
40	100–1,000	SFRHSD350-4000-□¹⁶)

Ø	Lengths¹⁶)	Part No.
45	100–1,000	SFRHSD350-4500-□¹⁶)
50	100–1,000	SFRHSD350-5000-□¹⁶)
55	100–1,000	SFRHSD350-5500-□¹⁶)
60	100–1,000	SFRHSD350-6000-□¹⁶)
65	100–1,000	SFRHSD350-6500-□¹⁶)
80	100–1,000	SFRHSD350-8000-□¹⁶)
100	100–1,000	SFRHSD350-10000-□¹⁶)

Available from stock
Produced to special order


Endurance runner with high media resistance – iglidur® H1



Order key for round bars

Type	Dimensions [mm]
------	-----------------

SF R H1-30 00 - 500



¹⁶) Length in mm
from 100 to 1,000,
graduated in
100 mm steps

Dimensions [mm]

Ø	Lengths¹⁶)	Part No.
10	100–1,000	SFRH1-1000-□¹⁶)
15	100–1,000	SFRH1-1500-□¹⁶)
20	100–1,000	SFRH1-2000-□¹⁶)
25	100–1,000	SFRH1-2500-□¹⁶)
30	100–1,000	SFRH1-3000-□¹⁶)
35	100–1,000	SFRH1-3500-□¹⁶)
40	100–1,000	SFRH1-4000-□¹⁶)

Ø	Lengths¹⁶)	Part No.
45	100–1,000	SFRH1-4500-□¹⁶)
50	100–1,000	SFRH1-5000-□¹⁶)
55	100–1,000	SFRH1-5500-□¹⁶)
60	100–1,000	SFRH1-6000-□¹⁶)
65	100–1,000	SFRH1-6500-□¹⁶)
80	100–1,000	SFRH1-8000-□¹⁶)
100	100–1,000	SFRH1-10000-□¹⁶)


For extreme ambient conditions – iglidur® C500



Order key for round bars

Type	Dimensions [mm]
------	-----------------

SF R C500-30 00 - 500



¹⁶) Length
in mm from
100 to 1,000,
graduated
in 100 mm
steps

Dimensions [mm]

Ø	Lengths¹⁶)	Part No.
10	100–1,000	SFRC500-1000-□¹⁶)
15	100–1,000	SFRC500-1500-□¹⁶)
20	100–1,000	SFRC500-2000-□¹⁶)
25	100–1,000	SFRC500-2500-□¹⁶)
30	100–1,000	SFRC500-3000-□¹⁶)
35	100–1,000	SFRC500-3500-□¹⁶)
40	100–1,000	SFRC500-4000-□¹⁶)

Ø	Lengths¹⁶)	Part No.
45	100–1,000	SFRC500-4500-□¹⁶)
50	100–1,000	SFRC500-5000-□¹⁶)
55	100–1,000	SFRC500-5500-□¹⁶)
60	100–1,000	SFRC500-6000-□¹⁶)
65	100–1,000	SFRC500-6500-□¹⁶)
80	100–1,000	SFRC500-8000-□¹⁶)
100	100–1,000	SFRC500-10000-□¹⁶)

iglus® constantly expands its range of available materials and dimensions. Please contact us in case the required diameter is not available.

iglidur® round bars | Product range

The food all-rounder, compliant with FDA-compliant and EC directive 10/2011 – iglidur® A181



Order key for round bars

Type	Dimensions [mm]
------	-----------------

SF R A181-30 00-500

Bar stock	Round	iglidur® material	Outer Ø	Inner Ø	Length ¹⁶⁾
-----------	-------	-------------------	---------	---------	-----------------------

¹⁶⁾ Length in mm from 100 to 1,000, graduated in 100 mm steps

Ø	Lengths ¹⁶⁾	Part No.
45	100-1,000	SFRA181-4500-□ ¹⁶⁾
50	100-1,000	SFRA181-5000-□ ¹⁶⁾
55	100-1,000	SFRA181-5500-□ ¹⁶⁾
60	100-1,000	SFRA181-6000-□ ¹⁶⁾
65	100-1,000	SFRA181-6500-□ ¹⁶⁾
80	100-1,000	SFRA181-8000-□ ¹⁶⁾
100	100-1,000	SFRA181-10000-□ ¹⁶⁾

Dimensions [mm]

Ø	Lengths ¹⁶⁾	Part No.
10	100-1,000	SFRA181-1000-□ ¹⁶⁾
15	100-1,000	SFRA181-1500-□ ¹⁶⁾
20	100-1,000	SFRA181-2000-□ ¹⁶⁾
25	100-1,000	SFRA181-2500-□ ¹⁶⁾
30	100-1,000	SFRA181-3000-□ ¹⁶⁾
35	100-1,000	SFRA181-3500-□ ¹⁶⁾
40	100-1,000	SFRA181-4000-□ ¹⁶⁾

The FDA-compliant endurance runner at high temperatures – iglidur® A350



Order key for round bars

Type	Dimensions [mm]
------	-----------------

SF R A350-30 00-500

Bar stock	Round	iglidur® material	Outer Ø	Inner Ø	Length ¹⁶⁾
-----------	-------	-------------------	---------	---------	-----------------------

¹⁶⁾ Length in mm from 100 to 1,000, graduated in 100 mm steps

Ø	Lengths ¹⁶⁾	Part No.
45	100-1,000	SFRA350-4500-□ ¹⁶⁾
50	100-1,000	SFRA350-5000-□ ¹⁶⁾
55	100-1,000	SFRA350-5500-□ ¹⁶⁾
60	100-1,000	SFRA350-6000-□ ¹⁶⁾
65	100-1,000	SFRA350-6500-□ ¹⁶⁾
80	100-1,000	SFRA350-8000-□ ¹⁶⁾
100	100-1,000	SFRA350-10000-□ ¹⁶⁾

Dimensions [mm]

Ø	Lengths ¹⁶⁾	Part No.
10	100-1,000	SFRA350-1000-□ ¹⁶⁾
15	100-1,000	SFRA350-1500-□ ¹⁶⁾
20	100-1,000	SFRA350-2000-□ ¹⁶⁾
25	100-1,000	SFRA350-2500-□ ¹⁶⁾
30	100-1,000	SFRA350-3000-□ ¹⁶⁾
35	100-1,000	SFRA350-3500-□ ¹⁶⁾
40	100-1,000	SFRA350-4000-□ ¹⁶⁾

Available from stock
Produced to special order

iglidur® round bars | Product range

The media and temperature specialist in the food sector – iglidur® A500



Order key for round bars

Type	Dimensions [mm]
------	-----------------

SF R A500-30 00-500

Bar stock	Round	iglidur® material	Outer Ø	Inner Ø	Length ¹⁶⁾
-----------	-------	-------------------	---------	---------	-----------------------

¹⁶⁾ Length in mm from 100 to 1,000, graduated in 100 mm steps

Dimensions [mm]

Ø	Lengths ¹⁶⁾	Part No.
10	100-1,000	SFRA500-1000-□ ¹⁶⁾
15	100-1,000	SFRA500-1500-□ ¹⁶⁾
20	100-1,000	SFRA500-2000-□ ¹⁶⁾
25	100-1,000	SFRA500-2500-□ ¹⁶⁾
30	100-1,000	SFRA500-3000-□ ¹⁶⁾
35	100-1,000	SFRA500-3500-□ ¹⁶⁾
40	100-1,000	SFRA500-4000-□ ¹⁶⁾

Ø	Lengths ¹⁶⁾	Part No.
45	100-1,000	SFRA500-4500-□ ¹⁶⁾
50	100-1,000	SFRA500-5000-□ ¹⁶⁾
55	100-1,000	SFRA500-5500-□ ¹⁶⁾
60	100-1,000	SFRA500-6000-□ ¹⁶⁾
65	100-1,000	SFRA500-6500-□ ¹⁶⁾
80	100-1,000	SFRA500-8000-□ ¹⁶⁾
100	100-1,000	SFRA500-10000-□ ¹⁶⁾

The food all-rounder – iglidur® A180



Order key for round bars

Type	Dimensions [mm]
------	-----------------

SF R A180-30 00-500

Bar stock	Round	iglidur® material	Outer Ø	Inner Ø	Length ¹⁶⁾
-----------	-------	-------------------	---------	---------	-----------------------

¹⁶⁾ Length in mm from 100 to 1,000, graduated in 100 mm steps

Dimensions [mm]

Ø	Lengths ¹⁶⁾	Part No.
10	100-1,000	SFRA180-1000-□ ¹⁶⁾
15	100-1,000	SFRA180-1500-□ ¹⁶⁾
20	100-1,000	SFRA180-2000-□ ¹⁶⁾
25	100-1,000	SFRA180-2500-□ ¹⁶⁾
30	100-1,000	SFRA180-3000-□ ¹⁶⁾
35	100-1,000	SFRA180-3500-□ ¹⁶⁾
40	100-1,000	SFRA180-4000-□ ¹⁶⁾

Ø	Lengths ¹⁶⁾	Part No.
45	100-1,000	SFRA180-4500-□ ¹⁶⁾
50	100-1,000	SFRA180-5000-□ ¹⁶⁾
55	100-1,000	SFRA180-5500-□ ¹⁶⁾
60	100-1,000	SFRA180-6000-□ ¹⁶⁾
65	100-1,000	SFRA180-6500-□ ¹⁶⁾
80	100-1,000	SFRA180-8000-□ ¹⁶⁾
100	100-1,000	SFRA180-10000-□ ¹⁶⁾

iglus® constantly expands its range of available materials and dimensions. Please contact us in case the required diameter is not available.


"Food" material with high media resistance up to +90 °C – iglidur® A160



Order key for round bars

Type	Dimensions [mm]
------	-----------------

SF R A160-30 00-500

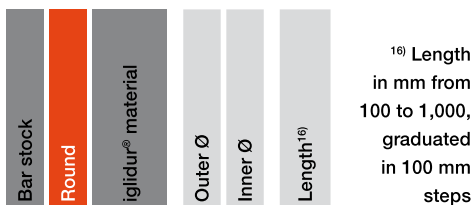

Dimensions [mm]

Ø	Lengths¹⁶)	Part No.
10	100–1,000	SFRA160-1000-□¹⁶)
15	100–1,000	SFRA160-1500-□¹⁶)
20	100–1,000	SFRA160-2000-□¹⁶)
25	100–1,000	SFRA160-2500-□¹⁶)
30	100–1,000	SFRA160-3000-□¹⁶)
35	100–1,000	SFRA160-3500-□¹⁶)
40	100–1,000	SFRA160-4000-□¹⁶)

Ø	Lengths¹⁶)	Part No.
45	100–1,000	SFRA160-4500-□¹⁶)
50	100–1,000	SFRA160-5000-□¹⁶)
55	100–1,000	SFRA160-5500-□¹⁶)
60	100–1,000	SFRA160-6000-□¹⁶)
65	100–1,000	SFRA160-6500-□¹⁶)
80	100–1,000	SFRA160-8000-□¹⁶)
100	100–1,000	SFRA160-10000-□¹⁶)


For contact with drinking water – iglidur® UW160



Order key for round bars

Type	Dimensions [mm]
------	-----------------

SF R UW160-30 00-500

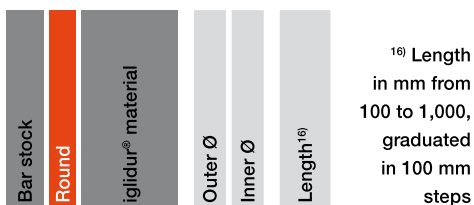

Dimensions [mm]

Ø	Lengths¹⁶)	Part No.
10	100–1,000	SFRUW160-1000-□¹⁶)
15	100–1,000	SFRUW160-1500-□¹⁶)
20	100–1,000	SFRUW160-2000-□¹⁶)
25	100–1,000	SFRUW160-2500-□¹⁶)
30	100–1,000	SFRUW160-3000-□¹⁶)
35	100–1,000	SFRUW160-3500-□¹⁶)
40	100–1,000	SFRUW160-4000-□¹⁶)

Ø	Lengths¹⁶)	Part No.
45	100–1,000	SFRUW160-4500-□¹⁶)
50	100–1,000	SFRUW160-5000-□¹⁶)
55	100–1,000	SFRUW160-5500-□¹⁶)
60	100–1,000	SFRUW160-6000-□¹⁶)
65	100–1,000	SFRUW160-6500-□¹⁶)
80	100–1,000	SFRUW160-8000-□¹⁶)
100	100–1,000	SFRUW160-10000-□¹⁶)

Available from stock
Produced to special order


For the tobacco industry – iglidur® T220



Order key for round bars

Type	Dimensions [mm]
------	-----------------

SF R T220-30 00-500

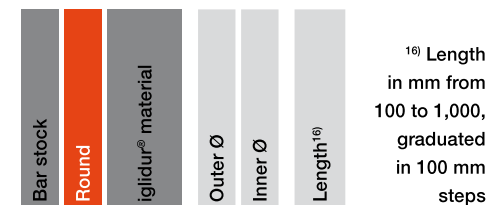

Dimensions [mm]

Ø	Lengths¹⁶)	Part No.
10	100–1,000	SFRT220-1000-□¹⁶)
15	100–1,000	SFRT220-1500-□¹⁶)
20	100–1,000	SFRT220-2000-□¹⁶)
25	100–1,000	SFRT220-2500-□¹⁶)
30	100–1,000	SFRT220-3000-□¹⁶)
35	100–1,000	SFRT220-3500-□¹⁶)
40	100–1,000	SFRT220-4000-□¹⁶)

Ø	Lengths¹⁶)	Part No.
45	100–1,000	SFRT220-4500-□¹⁶)
50	100–1,000	SFRT220-5000-□¹⁶)
55	100–1,000	SFRT220-5500-□¹⁶)
60	100–1,000	SFRT220-6000-□¹⁶)
65	100–1,000	SFRT220-6500-□¹⁶)
80	100–1,000	SFRT220-8000-□¹⁶)
100	100–1,000	SFRT220-10000-□¹⁶)


Used to prevent electro-static charges – iglidur® F2



Order key for round bars

Type	Dimensions [mm]
------	-----------------

SF R F2-30 00-500

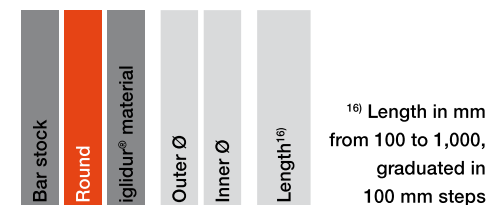

Dimensions [mm]

Ø	Lengths¹⁶)	Part No.
10	100–1,000	SFRF2-1000-□¹⁶)
15	100–1,000	SFRF2-1500-□¹⁶)
20	100–1,000	SFRF2-2000-□¹⁶)
25	100–1,000	SFRF2-2500-□¹⁶)
30	100–1,000	SFRF2-3000-□¹⁶)
35	100–1,000	SFRF2-3500-□¹⁶)
40	100–1,000	SFRF2-4000-□¹⁶)

Ø	Lengths¹⁶)	Part No.
45	100–1,000	SFRF2-4500-□¹⁶)
50	100–1,000	SFRF2-5000-□¹⁶)
55	100–1,000	SFRF2-5500-□¹⁶)
60	100–1,000	SFRF2-6000-□¹⁶)
65	100–1,000	SFRF2-6500-□¹⁶)
80	100–1,000	SFRF2-8000-□¹⁶)
100	100–1,000	SFRF2-10000-□¹⁶)

iglus® constantly expands its range of available materials and dimensions. Please contact us in case the required diameter is not available.


Versatile and cost-effective – iglidur® J2



Order key for round bars

Type	Dimensions [mm]
------	-----------------

SF R J2-30 00-500



¹⁶⁾ Length in mm
from 100 to 1,000,
graduated in
100 mm steps

Dimensions [mm]

Ø	Lengths ¹⁶⁾	Part No.
10	100-1,000	SFRJ2-1000-□ ¹⁶⁾
15	100-1,000	SFRJ2-1500-□ ¹⁶⁾
20	100-1,000	SFRJ2-2000-□ ¹⁶⁾
25	100-1,000	SFRJ2-2500-□ ¹⁶⁾
30	100-1,000	SFRJ2-3000-□ ¹⁶⁾
35	100-1,000	SFRJ2-3500-□ ¹⁶⁾
40	100-1,000	SFRJ2-4000-□ ¹⁶⁾

Ø	Lengths ¹⁶⁾	Part No.
45	100-1,000	SFRJ2-4500-□ ¹⁶⁾
50	100-1,000	SFRJ2-5000-□ ¹⁶⁾
55	100-1,000	SFRJ2-5500-□ ¹⁶⁾
60	100-1,000	SFRJ2-6000-□ ¹⁶⁾
65	100-1,000	SFRJ2-6500-□ ¹⁶⁾
80	100-1,000	SFRJ2-8000-□ ¹⁶⁾
100	100-1,000	SFRJ2-10000-□ ¹⁶⁾


Flame-retardant, according to DIN EN 45545 – iglidur® RW370



Order key for round bars

Type	Dimensions [mm]
------	-----------------

SF R RW370-30 00-500



¹⁶⁾ Length
in mm from
100 to 1,000,
graduated
in 100 mm
steps

Dimensions [mm]

Ø	Lengths ¹⁶⁾	Part No.
10	100-1,000	SFRRW370-1000-□ ¹⁶⁾
15	100-1,000	SFRRW370-1500-□ ¹⁶⁾
20	100-1,000	SFRRW370-2000-□ ¹⁶⁾
25	100-1,000	SFRRW370-2500-□ ¹⁶⁾
30	100-1,000	SFRRW370-3000-□ ¹⁶⁾
35	100-1,000	SFRRW370-3500-□ ¹⁶⁾
40	100-1,000	SFRRW370-4000-□ ¹⁶⁾

Ø	Lengths ¹⁶⁾	Part No.
45	100-1,000	SFRRW370-4500-□ ¹⁶⁾
50	100-1,000	SFRRW370-5000-□ ¹⁶⁾
55	100-1,000	SFRRW370-5500-□ ¹⁶⁾
60	100-1,000	SFRRW370-6000-□ ¹⁶⁾
65	100-1,000	SFRRW370-6500-□ ¹⁶⁾
80	100-1,000	SFRRW370-8000-□ ¹⁶⁾
100	100-1,000	SFRRW370-10000-□ ¹⁶⁾

Available from stock
Produced to special order


The versatile endurance runner – iglidur® J



Order key for tubes

Type	Dimensions [mm]
------	-----------------

SF T J -30 00-500



¹⁶⁾ Length in mm
from 100 to 1,000,
graduated in
100 mm steps

Dimensions [mm]

Inner Ø	Inner diameter tolerance	Outer Ø	Outer diameter tolerance	Length ¹⁶⁾	Part No.
70	-2.0 / -6.5	110	+1.5 / +4.5	100-1,000	SFTJ-11070
70	-2.0 / -6.5	125	+1.5 / -2.0	100-1,000	SFTJ-12570
100	-2.0 / -6.5	150	+1.5 / +4.5	100-1,000	SFTJ-150100

iglus® constantly expands its range of available materials and dimensions. Please contact us in case the required diameter is not available.