


电机支座

整合型传动座·方高型

B5
滚珠丝杠
支座组件

■方高型

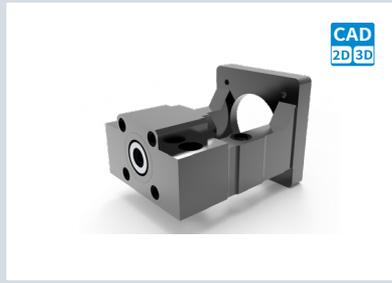

CAD
2D 3D


① 代号	类型	M 材质	S 表面处理
		①③④⑥	①③④⑥
MBF	整合型传动座 方高型	铸铁	发黑

产品特点: 使用之轴承经预压处理, 轴向间隙 0

订购编号示例

① 代号 - ② 轴径 - ③ 适用法兰 - ④ 中心高
MBF - 15 - 90 - 30

编号	名称	个数
1	传动座本体	1
2	轴承	1 组
3	压板	1
4	间隔环	2
5	油封	2
6	锁紧螺母	1 组

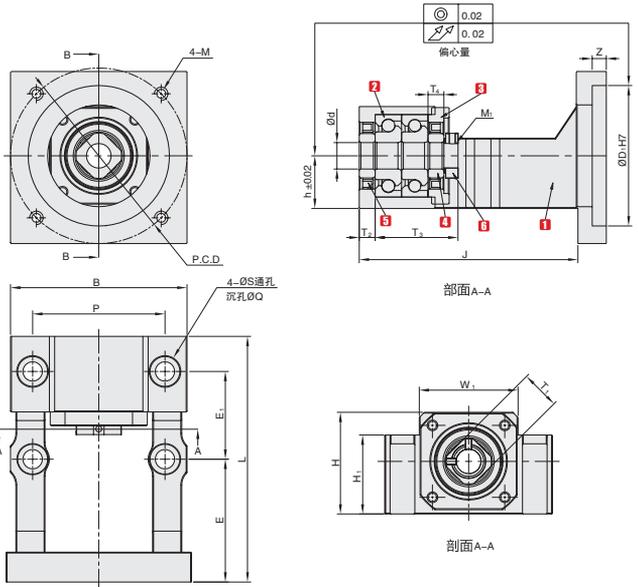

型号		适用类型	ΦD ₁	P.C.D	M	Z	B	P	L	J	E	E ₁	S	Q	H	H ₁	W ₁	T ₁	T ₂	T ₃	T ₄	M ₁	建议丝杠支座		建议电机规格	
代码	适用丝杠轴径																						适用电机法兰	中心高	支撑侧	止口规格
	② d	③ F*	④ h																							
MBF	15	100A	30	80	100	M6	8	100	75	140	125	70	50	11	17	56	9	22	47	9	M15×1.0	HQ-CSLK-15	80	100		
																							95	115		
																							110	130		
																							110	145		
																							110	153		
																							110	140		
	17	100A	30	80	100	M6	8	100	75	140	125	70	50	11	17	56	9	24	47	9	M17×1.0	-	80	100		
																							95	115		
																							110	130		
																							110	145		
																							110	153		
																							110	140		
20	100A	34	95	115	M8	8	100	75	140	125	70	50	11	17	56	9	30	50	11	M20×1.0	HQ-CSLK-20	80	100			
																						95	115			
																						110	130			
																						110	145			
																						110	153			
																						110	140			
20	100A	34	110	130	M8	10	100	75	140	125	70	50	11	17	56	9	30	50	11	M20×1.0	HQ-CSLK-20	110	130			
																						110	145			
																						110	153			
																						110	140			
																						110	153			
																						110	140			
15	86	30	73	98.4	M6	8	100	75	140	125	70	50	11	17	56	9	22	47	9	M15×1.0	HQ-CSLK-15	73	98.4			
																						34	34			
20	86	34	73	98.4	M6	8	100	75	140	125	70	50	11	17	56	9	30	50	11	M20×1.0	HQ-CSLK-20	73	98.4			
																						34	34			

▲轴承采用 P5 配对 DF 组装, 最适宜滚珠丝杠使用

▲* 带 S 为松下电机, 不带为其他电机品牌



1-9	10-
100%	询价