

# 轴承用型固定环

## 顶丝式标准型




■顶丝式标准型



类型		[M] 材质	[S] 表面处理	[A] 附件
短压环型	长压环型			
SCBBE	SCBBF	一般结构用钢	四氧化三铁保护膜	2 个止动螺丝
SCBEE	SCBEF		无电解镀锌	
SCBNE	SCBNF	不锈钢	-	2 个止动螺丝 ( 不锈钢 )
SCBCE	SCBCF	铝合金	本色阳极氧化	

A3  
固定环

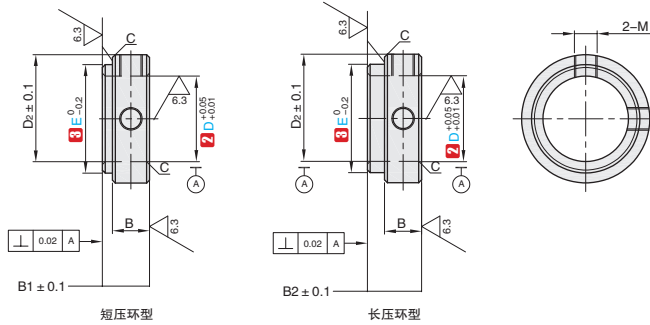

订购编号示例

① 代号 - ② D - ③ E  
SCBBE - D20 - E23

① 代号	内径		主要尺寸						可用轴承 ( 外径 )		
	② D	③ E	D <sub>2</sub>	B	B <sub>1</sub>	B <sub>2</sub>	M×长度	C			
( 短压环型 ) SCBBE SCBEE SCBNE SCBCE	3	5	10	7	8	11	M3×3	0.5	673(6)/683(7)		
		6							693(8)/603(9)/623(10)		
	4	6	12						674(7)/684(9)		
		7							694(11)/604(12)/624(13)		
	5	7	14						675(8)		
		8							685(11)/695(13)/605(14)/625(16)		
	6	8	15	676(10)/686(13)							
		9		696(15)/606(17)/626(19)							
	8	11	16	8.5	10	12.5	M4×3		688(16)		
		12							698(19)/608(22)/628(24)		
		13							6800(19)		
	10	14	18				6900(22)/6000(26)				
16		6200(30)/6300(35)									
12	15	22	6801(21)								
	16		6901(24)/6001(28)								
	18		6201(32)/6301(37)								
15	18	25	6802(24)/6902(28)								
	19		6002(32)								
	21		6202(35)/6302(42)								
( 长压环型 ) SCBBF SCBEF SCBNF SCBCF	17	20	10	12	15	M6×5	6803(26)				
		21					6903(30)/6003(35)				
	23	6203(40)/6303(47)									
	20	23					32	15.5	19	M8×6	6704(27)/6804(32)
		24									6904(37)
	25	27					42	13	21	M10×8	6004(42)/6204(47)
		28	6805(37)								
	30	29	45	15	19	M8×6	6905(42)				
		31					6005(47)				
		32					6205(52)				
	35	33	50	15	21	M10×8	6806(42)				
		35					6906(47)				
38		6006(55)/6206(62)/6306(72)									
40	38	60	15	21	M10×8	6807(47)					
	41					6907(55)					
	43					6007(62)/6207(72)					
48	43	60	15	21	M10×8	6808(52)					
	45					6908(62)					
	48					6008(68)/6208(80)					