

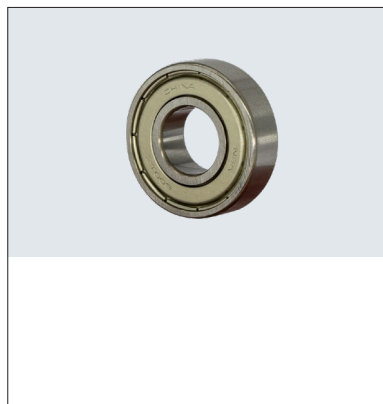


# 双列角接触球轴承 双面带防尘盖式

★ 产品特点: 适用于负载较大的场景



代号	类型	后置代码	轴承精度	轴承M材质		接触角(°)
				国标	相当	
BCG	标准型	ZZ(双面带防尘盖式)	GB/T 307.1 0级	GCr15	SUJ2	30

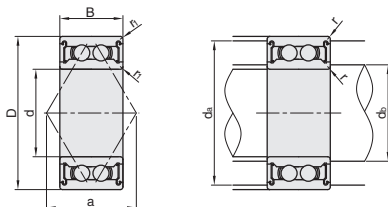

视角标准: 第一视角



型号  
BCG-3200ZZ

代号	型号	d	D	B	r <sub>1</sub> (min)	基本额定负载		参考转速rpm(参考)		作用点 a	安装尺寸			参考重量 (kg)	
						Cr(动)KN	Cor(静)KN	脂润滑	油润滑		d <sub>s</sub> (min)	d <sub>s</sub> (max)	r(max)		
BCG	3200ZZ	10	30	14.3		7	3.8	15000	20000	19.5	14.5	25.5		0.052	
	3300ZZ		35	19		9.2	5.1	14200	19000	12.5	16	31.5		0.112	
	3201ZZ	12	32	15.9	0.6			14000	18000	21.7	16.5	27.5	0.6	0.063	
	3301ZZ		37	19		10	6.1	13200	17000	14.5	18	33.5		0.123	
	3202ZZ	15	35	15.9				12000	16000	23.6	19.5	30.5		0.072	
	3302ZZ		42	19	1			10000		27.6	20.5	36.5	1	0.132	
	3203ZZ	17	40	17.5	0.6	12.8	7.9		11000		26.6	21.5	35.5	0.6	0.1
	3303ZZ		47	22.2		20.4		9400	13000	31	22.5			0.192	
	3204ZZ	20		20.6	1	19	12.1	9000	12000	31.5	25.5	41.5		0.17	
	3304ZZ		52	22.2	1.1		12.7	8200	11000	33.8	27	45		0.23	
	3205ZZ	25		20.6	1	20.6	14.3	7800	10000	34.4	30.5	46.5	1	0.19	
	3305ZZ		62	25.4	1.1	30.5	20.5	6800	9100	40.5	32	55		0.369	
	3206ZZ	30		23.8	1	28.6	20.4	6500	8700	40.7	35.5	56.5		0.32	
	3306ZZ		72	30.2		39.5	27.5	5800	7800	47.2	37			0.585	
	3207ZZ	35		27	1.1	38	27.8	5600	7500	46.9	42	65		0.48	
	3307ZZ		80	34.9	1.5	49.5	35	5200	7000	53.4	43.5	71.5	1.5	0.816	
	3208ZZ	40		30.2	1.1	42.5	32.5	5000	6700	52.6	47	73	1	0.65	
	3308ZZ		90	36.5	1.5	60.5	44		4600	58.9	48.5	81.5	1.5	1.07	
	3209ZZ	45		85	30.2	1.1	48	37		56.3	52	78	1	0.71	
	3309ZZ		100	39.7	1.5	72.5	54	4100	5500	65.6	53.5	91.5	1.5	1.42	
	3210ZZ	50		90	30.2	1.1	51	42	4300	5700	58.8	57	83	1	0.76
	3310ZZ		110	44.4	2	85.5	64.5	3800	5000	71.7	60	100	2	1.95	
	3211ZZ	55		100	33.3	1.5	63	53	3900	5100	65	63.5	91.5	1.5	1.05
	3311ZZ		120	49.2	2	106	82	3400	4500	79.3	65	110	2	2.53	
	3212ZZ	60		110	36.5	1.5	71.5	58.5	3500	4700	71.3	68.5	101.5	1.5	1.4
	3312ZZ		130	54	2.1	122	95.5	3100	4200	87.4	72	118	2	3.24	
	3213ZZ	65		120	38.1	1.5	83.5	72.5	3200	4300	76.8	73.5	111.5	1.5	1.75
	3313ZZ		140	58.7	2.1	138	109	2900	3900	92.7	77	128	2	4.08	
	3214ZZ	70		125	39.7	1.5	87.5	79.5	3100	4100	80.7	78.5	116.5	1.5	1.92
	3314ZZ		150	63.5	2.1	155	125	2700	3600	99.7	82	138	2	5.04	
	3215ZZ	75		130	41.3	1.5	90	80.5	2900	3900	84.7	83.5	121.5	1.5	2.1
	3315ZZ		160	68.3	2.1	168	141	2500	3300	108.7	87	148		6.16	
	3216ZZ	80		140	44.4	2	106	95.5	2700	3600	90.7	90	130	2	2.64
	3316ZZ		170	68.3	2.1	175	151	2400	3100	113.1	92	158	2	6.93	
	3217ZZ	85		150	49.2	2	112	106	2500	3400	98.4	95	140		3.39
	3317ZZ		180	73	3	196	240	2200	3000	118.8	99	166	2.5	8.30	
	3218ZZ	90		160	52.4	2	140	129	2400	3100	104.1	100	150	2	4.14
	3318ZZ		190	73	3	225	266	2100	2800	125.5	104	176	2.5	9.23	
	3219ZZ	95		170	55.6		163	184	2200	3000	110.6	107	158		5
	3220ZZ	100		180	60.3	2.1	210	240	2100	2800	116.8	112	168	2	6.1

- ▲ 1kgf=9.8N
- ▲ 不承诺此产品品牌
- ▲ 更多规格请咨询客服



交货期

4天发货

C2 轴承关节轴承  
锁紧螺母